

DT 200 A DIPTANK



FEATURES:

- Automatic platform with conveyor belt
- Digital temperature control
- Pneumatic movement
- Stainless steel housing
- Optimal hygiene
- Maximum loading capacity: 30 kg
- Machine dimensions: 1170 x 1700 x 1350 mm
- Chamber dimensions: 575 x 1098 x 200 mm
- Emersion depth: 200mm
- Dip time: 3-5 seconds
- Cycle time: 22 seconds
- Power: 23 kW
- Voltage: 400 V 3-50Hz
- Compressed Air consumption 50l/min 6 bar
- Fully insulated
- Vapor exhaust ø125 mm, equipped with built in fan
- Water drain 2"
- Automatic water level control
- Built-in lime scale protection

DESCRIPTION:

Combined with a vacuum packaging machine, the automatic DT 200 A produces perfect skin packages for an aesthetic presentation. Ideal to create an automatic line This machine fully complies with CE standards.



DIPTANK — DT 200 A — SPEC SHEET



Sales and Service Support

Phone:
(07) 3806 5972

Email:
sales@vacpac.com.au
service@vacpac.com.au


Visit our Showroom

Unit 3, 14-16 Cairns Street,
Loganholme QLD, Australia
4129

DT 200 A DIPTANK



DIMENSIONS (IN MM)

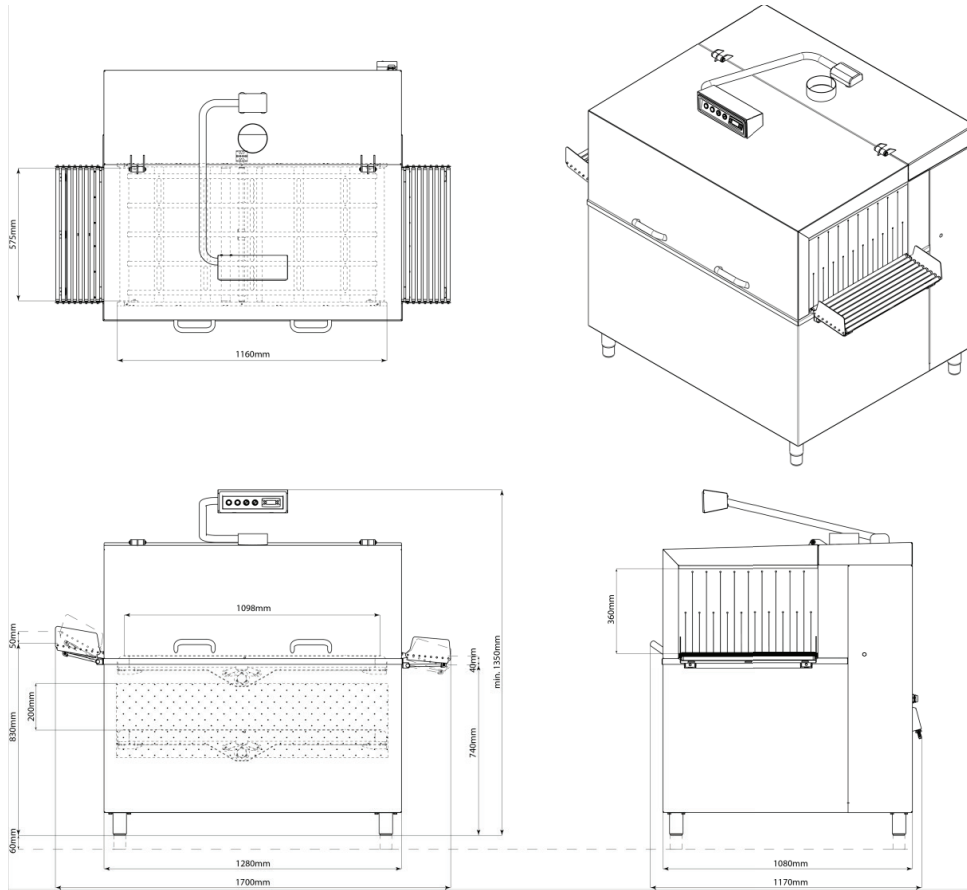

DIPTANK — DT 200 A — SPEC SHEET

Model	Dimensions (mm)		Voltage* (Hz)	Power (kW)	Weight (kg)
	Chamber (usable space) L x W x H	Machine L x W x H			
Diptank DT 200 A	575 x 1098 x 200	1170 x 1700 x 1350	400V-3~ 50Hz	23,0	310 (with water 600)
* Other voltages available					



Sales and Service Support

Phone:
(07) 3806 5972

Email:
sales@vacpac.com.au
service@vacpac.com.au

Visit our Showroom

Unit 3, 14-16 Cairns Street,
Loganholme QLD, Australia
4129